

TRINITY FLOORING SPECIFICATIONS

PRODUCT INFORMATION

CONSTRUCTION	Engineered Rigid Core Stone-Polymer Composite (SPC) with 1.2mm White Oak or Hickory Veneer
PLANK DIMENSIONS	1/4" Thick x 5" Wide x Random Length up to 48" (attached 1mm IXPE pad)
MILLING	4 sided Micro-Bevel Edge / Uniclic® Locking System
FINISH	Aluminer™ Aluminum Oxide Finish / Wire Brushed
COLOR VARIANCE	Hardwood is a natural product, thus colors and tones may vary.
INSTALLATION	Float. Above, on, or below grade.
ENVIRONMENTAL	CARB II Compliant / FloorScore® Certified
WATER PERFORMANCE	Waterproof hardwood and safe to install in kitchens, bathrooms and basements.

PACKAGING


BOX WEIGHT: 42 LBS	PACK SIZE: 42 Boxes/Pallet	BOX DIMENSIONS: 3" x 5.5" x 48.5"
SQFT PER BOX: 16.68		PALLET DIMENSIONS: 24" x 40" x 49"

WARRANTY

FINISH	50-year Residential / 15-year Light Commercial
STRUCTURE	Lifetime Structural Warranty

RESOURCES

Download the latest versions of our installation and maintenance guides, as well as watch installation videos, at www.bhwfloors.com

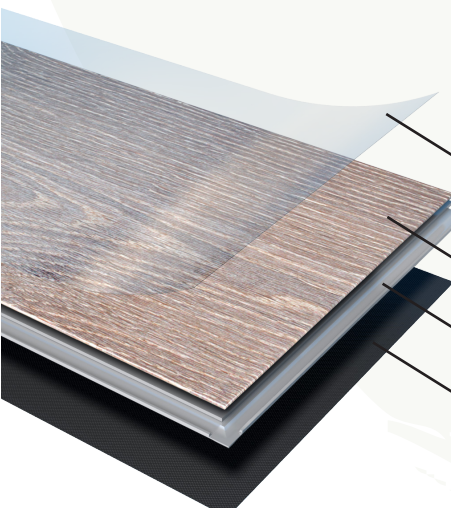

ALUMINER™
 (8 LAYERS OF PROTECTIVE COATING)
 1.2MM VENEER
 RIGID CORE SPC
 1MM IXPE PAD

